

TOYANI

ANDROID SYSTEM - TOUCH FUNCTION

Support Landscape and vertical display, screen rotation

Automatic circulation display, time-power-off support

Subtitle shows

FHD display




Work 7/24

Ultra-thin fuselage, aluminum alloy case, industrial structure design

Support HDMI/USB / RJ45/WIFI display



Model	EWT32	EWT42	EWT50	EWT55	EWT65	EWT70	EWT84	EFT42	EFT50	EFT55	EFT65	EFT70
installation	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	32	42	50	55	65	70	84	42	50	55	65	70
demension(mm)	772*468*56	1018*611*56	1286*688*56	1286*758*56	1544*910*56	1642*964*56	1764*1012*87	1790*632*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
effective(mm)	698*392	930*523	1096*616	1209*680	1428*804	1550*872	1860*1046	930*523	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	3840*2160	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
CPU	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3	1GB DDR3
memory	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G
system	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2
touch	2 finger(4/6finger optical)											
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°
working temp	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°
Working Humidity	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%
video format	MPEG-1 · MPEG-2 · WMV9 · AVI(3.11) · XVID · H264 · 1080P/60											
audio format	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA
picture format	JPEG · BMP · PNG											
interface	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1	USBx3, RJ45X1
power	AC 100~240V, ≤40W											
weight(kg)	22	34	54	60	80	90	137	54	74	80	100	110
packing	895*575*150	1120*715*175	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1964*1212*207	1990*832*200	2120*928*200	2170*1000*200	2330*1136*200	2380*1209*200



TOYANI

WINDOWS SYSTEM - TOUCH FUNCTION

Support Landscape and vertical display, screen rotation

Automatic circulation display, time-power-off support


Subtitle shows

FHD display



Work 7/24

Ultra-thin fuselage, aluminum alloy case, industrial structure design

Support HDMI/USB / RJ45/WIFI display

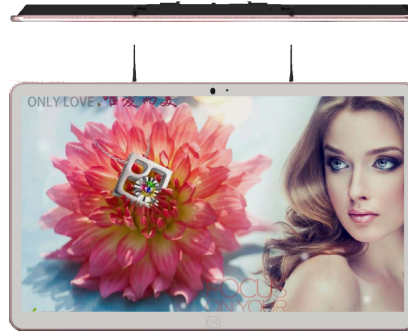

Model	TF32	TF42	TF50	TF65	TW32	TW42	TW50	TW55	TW65	TW70	TW84	TF32	TF50	TF55	TF65	TF70
installation	table	table	table	table	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	32	42	50	65	32	42	50	55	65	70	84	42	50	55	65	70
demension(mm)	767*464*75	1003*592*76	1167*690*76	1501*875*76	767*464*75	1003*592*76	1167*690*76	1286*758*76	1501*875*76	1615*941*76	1764*1012*87	1790*632*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
effective(mm)	698*392	930*523	1096*616	1428*804	698*392	930*523	1096*616	1209*680	1428*804	1539*865	1860*1046	930*523	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	3840*2160	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
CPU	Intel 1037U (i3/i5/i7 optical)															
memory	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3
hardisk	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB	320GB
system	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8	Win7/8
IR touch point	2 finger(4/6finger optical)															
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
working temp	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°
Working Humid	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
interface	USB/VGA/HDMI/RJ45				USB/VGA/HDMI/RJ45				USB/VGA/HDMI/RJ45				USB/VGA/HDMI/RJ45			
video format	MPEG-1, MPEG-2, WMV9, AVI(3.11), XVID, H264, 1080P/60				MPEG-1, MPEG-2, WMV9, AVI(3.11), XVID, H264, 1080P/60				MPEG-1, MPEG-2, WMV9, AVI(3.11), XVID, H264, 1080P/60				MPEG-1, MPEG-2, WMV9, AVI(3.11), XVID, H264, 1080P/60			
audio format	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA
picture format	JPEG, BMP, PNG				JPEG, BMP, PNG				JPEG, BMP, PNG				JPEG, BMP, PNG			
power	AC 100~240V 50/60Hz, ≦ 130W				AC 100~240V 50/60Hz, ≦ 130W				AC 100~240V 50/60Hz, ≦ 130W				AC 100~240V 50/60Hz, ≦ 130W			
weight	54	66	86	110	24	36	56	62	83	95	137	54	74	80	100	110
packing	screen 895*575*150; base1030*550*500	screen 1120*715*175; base1030*550*500	screen 1450*910*195; base1030*550*500	screen 1480*1058*200; base1030*550*500	895*575*150	1120*715*175	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1964*1212*207	1990*832*200	2120*928*200	2170*1000*200	2330*1136*200	2380*1209*200



ANDROID SYSTEM - OUTDOOR DISPLAY

FHD 1080P display
 Outdoor Protection Degree IP65 , waterproof , dust proof
 Outdoor LCD special tempering glass , anti-vandal , Anti-glare
 LCD brightness up to 3000cd/m², Sunlight readable
 brightness auto adjust by sunlight
 Intelligent control temperature system
 Internet control



panel size	43	49	55
type	floor stand	floor stand	floor stand
demesnion	1750*780*198mm	1970*809*198mm	2100*880*198mm
resolution	1920*1080	1920*1080	1920*1080
aspect ratio	16:09	16:09	16:09
color	16.7M	16.7M	16.7M
brightness	1500-3000cd/m ²	1500-3000cd/m ²	1500-3000cd/m ²
contrast	5000:1	5000:1	5000:1
CPU	RK3188 2GB DDR3	RK3188 2GB DDR3	RK3188 2GB DDR3
memory	8G	8G	8G
system	Android 4.2.2	Android 4.2.2	Android 4.2.2
response time	5ms	5ms	5ms
view angle	178°	178°	178°
working temp	-35℃~55℃	-35℃~55℃	-35℃~55℃
Working Humidity	'10%~90%	'10%~90%	'10%~90%
video format	PG,MPG-1,MPG-2,MPG-4,AVI,MP4, TS,MKV,WVMV		
audio format	MP3、WMA	MP3、WMA	MP3、WMA
picture format	GIF,JPEG,PNG,BMP	GIF,JPEG,PNG,BMP	GIF,JPEG,PNG,BMP
interface	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI
lift time	60000 hour	60000 hour	60000 hour
protect degree	IP65	IP65	IP65
cooling model	Aluminium material military grade radiating base plate		
protective glass	6mm AR	6mm AR	6mm AR
power supply	AC100V~240V,300W	AC100V~240V, 300W	AC100V~240V,350W
weight(kg)	50	65	70

ANDROID & WINDOWS (DUAL SYSTEM) INTERACTIVE WHITE BOARD

Equipped with Android writing software
 Support 4K Ultra HD
 Operation system: Android & Windows dual system
 Smart sider menu
 Pure aluminum alloy frame, explosion proof tempered glass
 All-channel annotating
 Wireless screencast and wireless sharing
 Multi-point touch screen and user experienced design



Model	IWB55	IWB65	IWB75	IWB86	IWB98
Panel size	55"	65"	75"	86"	98"
demension(mm)	1300*104*811	1519*114*935	1745*111*1064	1998*115*1209	2242*117*1338
power consumption	140W	170W	400W	440W	480W
resolution	3840*2160P	3840*2160P	3840*2160P	3840*2160P	3840*2160P
view angel	178	178	178	178	178
brightness	500cd/m ²	500cd/m ²	500cd/m ²	500cd/m ²	500cd/m ²
contrast ratio	5000:1	5000:1	5000:1	5000:1	5000:1
response time	4ms	4ms	4ms	4ms	4ms
color	1.07B	1.07B	1.07B	1.07B	1.07B
dual system	winsows and android				
OPS	intel i3/i5				
Storage	120G				
interface	HDMI*2	HDMI*2	HDMI*2	HDMI*2	HDMI*2
	VGA*1	VGA*1	VGA*1	VGA*1	VGA*1
	AUDIO*1	AUDIO*1	AUDIO*1	AUDIO*1	AUDIO*1
	YPBPR*1	YPBPR*1	YPBPR*1	YPBPR*1	YPBPR*1
	AV*1	AV*1	AV*1	AV*1	AV*1
	USB*6	USB*6	USB*6	USB*6	USB*6
	RS232*1	RS232*1	RS232*1	RS232*1	RS232*1
	DP*1	DP*1	DP*1	DP*1	DP*1
	MIC*1	MIC*1	MIC*1	MIC*1	MIC*1
	LAN*1	LAN*1	LAN*1	LAN*1	LAN*1
packing (mm)	1532*252*967	1765*320*1165	1990*320*1165	2200*360*1490	2525*435*1750

FHD | | | | | | |

Full HD Display | Outdoor Protection Degree IP65 , waterproof , dust proof | Special tempering glass , Anti-Vandal , Anti-glare | Brightness auto adjust by sunlight | Intelligent control temperature system | Internet control

4KUHD | | | |

4K Ultra HD | Equipped with Android writing software | Android & Windows dual system | Multi-point touch screen | Pure aluminum alloy frame, explosion proof tempered glass

All-channel annotating | Wireless screencast and sharing | Smart sider menu

TOYANI

WINDOWS SYSTEM

Support Landscape and vertical display,screen rotation

Automatic circulation display ,time-power-off support

Subtitle shows

FHD display

Work 7/24

Ultra-thin fuselage, aluminum alloy case, industrial structure design


Support HDMI/USB / RJ45/WIFI display



Model	EW19W	EW22W	EW32W	EW42W	EW43W	EW47W	EW49W	EW50W	EW55W	EW65W	EW70W	EF42W	EF43W	EF49W	EF50W	EF55W	EF65W	EF70W
installation	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	19	22	32	42	43	47	49	50	55	65	70	42	43	49	50	55	65	70
dimension(mm)	460*285*38	526*322*38	772*468*56	1017*610*56	1018*611*56	1116*670*56	1166*687*56	1167*688*56	1286*758*56	1544*910*56	1642*964*56	1789*631*80	1790*632*80	1919*727*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
effective(mm)	409*229	475*267	698*392	930*523	930*523	1040*585	1096*616	1096*616	1209*680	1428*804	1550*872	930*523	930*523	1096*616	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
CPU	Intel 1037U (i3/i5/i7 optical)																	
memory	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3	2GB DDR3
system	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10	win7/8/10
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°
working temp	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°	-10°~50°
Working Humidity	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%	-10%~90%
video format	MPEG-1, MPEG-2, WMV9, AVI(3.11), XVID, H264, 1080P/60																	
audio format	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA	MP3, WMA
picture format	JPEG, BMP, PNG																	
interface	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI	HDMI/USB/RJ45/WIFI
power	AC 100~240V, ≒ 40W																	
weight(kg)	15	17	22	34	34	44	54	54	60	80	90	54	54	74	74	80	100	110
packing	590*405*115	660*440*115	895*575*150	1120*715*175	1120*715*175	1300*810*185	1450*910*195	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1990*832*200	1990*832*200	2120*928*200	2120*928*200	2170*1000*200	2330*1136*200	2380*1209*200



Windows System



Landscape & Portrait Display



Ultra-thin Fuselage & Industrial structure design



Subtitle Shows




Work 7/24



Full HD Display



Support HDMI/USB /RJ45/WIFI Display



Automatic Circulation Display & Time Power-Off Support

TOYANI

ANDROID SYSTEM

Support Landscape and vertical display,screen rotation

Automatic circulation display ,time-power-off support

Subtitle shows

FHD display

Work 7/24

Ultra-thin fuselage, aluminum alloy case, industrial structure design


Support HDMI/USB / RJ45/WIFI display



Model	EW19	EW22	EW32	EW42	EW43	EW47	EW49	EW50	EW55	EW65	EW70	EF42	EF43	EF49	EF50	EF55	EF65	EF70
installation	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	wall-mounted	floor stand	floor stand	floor stand	floor stand	floor stand	floor stand	floor stand
screen size	19	22	32	42	43	47	49	50	55	65	70	42	43	49	50	55	65	70
demension(mm)	460*285*38	526*322*38	772*468*56	1017*610*56	1018*611*56	1116*670*56	1166*687*56	1167*688*56	1286*758*56	1544*910*56	1642*964*56	1789*631*80	1790*632*80	1919*727*80	1920*728*80	1970*800*80	2130*936*80	2180*1009*80
effective(mm)	409*229	475*267	698*392	930*523	930*523	1040*585	1096*616	1096*616	1209*680	1428*804	1550*872	930*523	930*523	1096*616	1096*616	1209*680	1428*804	1550*872
resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
brightness	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2	500cd/m2
contrast	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1	5000:1
CPU	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3	RK3188 1GB DDR3
memory	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G	8G
system	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2	Android 4.2.2
response time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
view angle	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°	178°
working temp	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°	'-10°~50°
Working Humidity	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%	'-10%~90%
video format	MPEG-1、MPEG-2、WMV9、AVI(3.11)、XVID、H264、1080P/60																	
audio format	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA	MP3、WMA
picture format	JPEG、BMP、PNG																	
interface	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI	HDMI/USB/RJ45/ WIFI
power	AC 100~240V, ≅ 40W																	
weight(kg)	15	17	22	34	34	44	54	54	60	80	90	54	54	74	74	80	100	110
packing	590*405*115	660*440*115	895*575*150	1120*715*175	1120*715*175	1300*810*185	1450*910*195	1450*910*195	1480*1058*200	1744*1100*200	1842*1164*240	1990*832*200	1990*832*200	2120*928*200	2120*928*200	2170*1000*200	2330*1136*200	2380*1209*200



Android System



Landscape & Portrait Display



Ultra-thin Fuselage & Industrial structure design



Subtitle Shows



Work 7/24



Full HD Display



Support HDMI/USB/RJ45/WIFI Display



Automatic Circulation Display & Time Power-Off Support